

WEIGHT CLASS
1.6 TONNE
| TB215R |



SHORT TAIL SWING EXCAVATOR



TAKEUCHI
Japanese for Reliability

TB215R short tail swing mini excavator



Takeuchi introduce the new TB215R, a 1.5 tonne short tail swing mini excavator. The TB215R offers the most compact mini excavator in the Takeuchi range and gets the mini digger into the tightest spaces. An excellent alternative for tool hire, utilities, light landscaping and jobbing builders.

A very compact machine, just 720mm slew radius, the TB215R is a powerful lightweight option.

Designed with a longer dipper arm and track frame the New TB215R offers excellent working ranges for a 1.5 tonne machine weight class; maximum dig depth 2390mm and dump height 2545mm.



ROBUST FOR SITE

The cast steel boom and dipper provide maximum strength.

The top mounted hydraulic cylinders and internally routed hoses provide added on-site protection.



PROVEN EXPANDABLE TRACK FRAME

A unique expanding track frame adjusts from 980 to 1300mm getting access in narrow spaces. Added track width gives greater operating stability. The TB215R has double flanged rollers for reliable track retention.

The TB215R is a very well protected mini digger built for the toughest site conditions.

Operators enjoy the smooth operation and powerful digging force from a compact portable machine. With a maximum dig depth up to 2390mm and dump height of 2545mm alongside a maximum reach at ground level as far as 3945mm the TB215R really does outperform for its compact size.

Precise proportional control valves achieve the smoothest digging operation vital in critical dig sites working around live cables and pipes.

A 1.5 tonne short tail swing is an excellent alternative when space is limited for all types of application - landscaping, utilities, groundworks and street works.

With a reputation for reliability, Japanese build quality makes all the difference.

PROTECT YOUR INVESTMENT

The TB215R now comes with the new **TSS Takeuchi Security System** as standard.



REDUCED TAIL SWING

Offering excellent accessibility the TB215R with just 720mm slew radius and a compact rear side, will work close up to walls without any potential machine damage. The TB215R has just 70mm overhang at 90° to extended track.



EASY ACCESS & MAINTENANCE

Service door for easy radiator access, fuel filter and maintenance. A conveniently placed bracket for grease gun at the front of the canopy and the toolbox area behind the seat. The battery is positioned below the seat.



PERFORMANCE

- Proven strong track frame design offers excellent balance and stability with a longer than average track frame (1570mm).
- Simultaneous operation of swing and digging function, and two speed travel gives fast cycle times.
- Auxiliary hoses are easy to attach and well positioned high up the dipper arm for added protection.

OPERATION

- Boom swing angle RH 50° and LH 70°.
- Cushioned main boom and swing cylinders for smooth operation.
- Boom and canopy mounted work lights give options for all types of working conditions.
- Well positioned enhanced VDU - warning indicators, rpm, hour meter, fuel, battery charge, temperature, oil pressure and maintenance alerts.


SAFETY & SERVICE

- Enhanced 100% steel wraparound frame protects key components.
- Standard service features include; Safe Drain engine oil system, fuel drain system, hydraulic oil cooler and maintenance-free battery. Hydraulic and fuel gauges in both the cab and at filler point.

OPTIONS

- TKB52-S Breaker
- Quick Hitch
- Bucket sizes from 150-1000mm



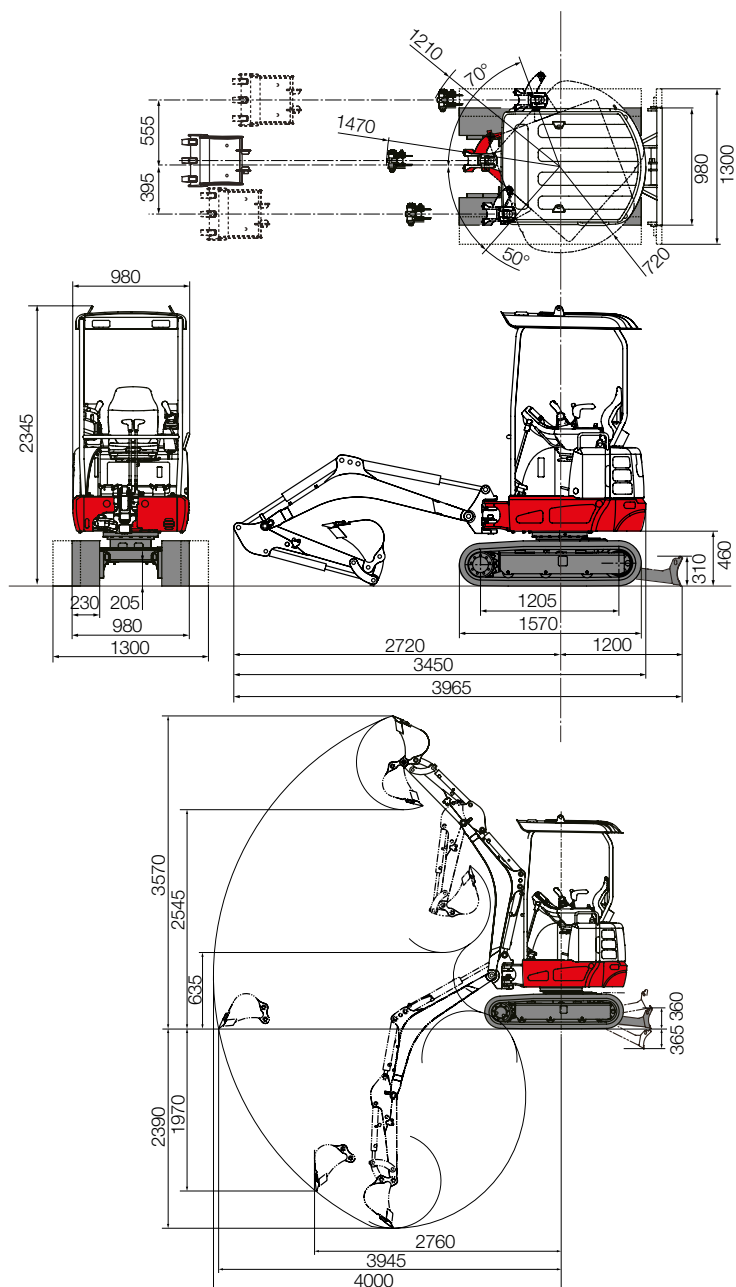

TB215R

Standard UK Specification - Long Dipper

Engine	
Make	YANMAR
Model	3TNV 70
Rated Output (kW)/rpm	11.5/2400
Maximum Torque (Nm)	52.7
Cylinders	3
Displacement (cc)	854

Dimensions & Weight	
Operating Weight inclusive of bucket and fuel (kg)	1650
Overall Length (mm)	3450
Overall Length dozer at rear (mm)	3965
Width cab/canopy (mm)	980
with extended track (mm)	1300
Height cab/canopy (mm)	2345
Ground Clearance (mm)	205
Min. Front Swing Radius (mm)	1470
Tail Swing Radius (mm)	720

Operating Information	
Max Digging Depth (mm)	2390
Max Dump Height (mm)	2545
Max Reach at Ground Level (mm)	3945
Max Vertical Digging Depth (mm)	1970
Max Bucket Digging Force (kN)	14
Max Arm Digging Force (kN)	8.2

Hydraulic System	
Set Pressure (bar)	210
Pump Type	Variable
Hydraulic Flow Aux Port (l/min)	33

Swing System	
Boom Swing Angle (R/L)	50° / 70°
Slew Speed (rpm)	9.2
Slew Motor	Trachoid Gear

Undercarriage	
Traction Motor	Piston
Traction Drive	Epicyclic Gearing
Traction Brake	Friction Brake
Traction Width (mm)	230
Ground Contact Length (mm)	1155
Ground Pressure (kpa)	26.2
Travel Speed (km/h)	2.2-4.2
Maximum Gradeability	30°

Capacities	
Hydraulic System (l)	24
Fuel Tank (l)	22
Engine Lubrication (l)	4.3
Cooling System (l)	3.9

All dimensions unless otherwise stated are in millimeters.

For more information locally

call us direct, or contact:



Takeuchi Mfg (UK) Ltd, Unit E2B Kingsway Business Park,
John Boyd Dunlop Drive, Rochdale, Lancashire OL16 4NG
Tel: 01706 657 722 Fax: 01706 657 744

Southern Depot at 20 Colthrop Business Park
Colthrop Lane, Thatcham, Newbury, Berks RG19 4NB
Tel: 01635 877 196 Fax: 01635 877 195

www.takeuchi-mfg.co.uk Email: sales@takeuchi-mfg.co.uk

Takeuchi machines come with a 2 year/2000 hours warranty as standard. Warranty exceptions to 1 year; fuel injection systems, electrical components, paint work.

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment.

TAKEUCHI
Japanese for Reliability