

COMPACT EXCAVATOR

O HIE

ALWAYS AN INVESTMENT ADVANTAGE

TB235-2

Ĵ

0

3-YEAR / 3,000 HOUR WARRANTY AS STANDARD*



Compact 3.5 tonne mini excavator - powerful performance

The TB235-2 mini excavator brings operators the most comfortable operation and powerful digging performance.

With 18.2kW of power the new TB235-2 works within the restrictions of Stage V emissions for a compact machine size.

The TB235-2 design now features a rounded body for improved visibility and functionality, and the conventional tail swing with reduced overhang provides outstanding stability.



ENHANCED FEATURES

akeuch

The TB235-2 comes with factory-fitted hydraulic hitch pipework as standard.

Auxiliary flows adjustable from the cab control panel.

Electric throttle control makes it easy to set the throttle to the desired position for operation.

The TB235-2 now features LED lighting for maximum efficiency, visibility and safety on site.



On site, the 3.5 tonne TB235-2 mini excavator provides a compact size with familiar Takeuchi comfort and control.

Highly engineered reliable and touch sensitive controls, the light touch gives the operator far more accurate control when digging in tough ground conditions with excellent hydraulic power when required. The higher than average bucket breakout force gets a greater digging performance. The TB235-2 offers excellent dig depth of 3245mm. The roomy isolated cab minimises the impact felt by the operator.

If you're familiar with Takeuchi compact excavators the TB235-2 offers proven reliability and performance for plant hire, ground works, civils, earthmoving, utilities and much more.

With a reputation for reliability, Japanese build quality makes all the difference.



OPERATOR COMFORT

The stylish cab comes with a fully adjustable seat and arm rest. Radio/MP3 socket, drinks holder and additional foot and storage room.

The TB235-2 is fitted with both foot pedal and hand travel lever controls.

Operators familiar with larger excavators often prefer traditional foot pedals to hand lever options. Air conditioning is an option on the TB235-2.







DESIGNED FOR EASY SERVICE

The TB235-2 is uniquely designed for quick and easy service and maintenance.

Easy access to service areas, easy refuelling point, access at ground level to service points and a well positioned hour meter.

Warning devices help prevent service issues: battery charge, engine oil pressure, coolant temperature, air cleaner, water temperature and fuel gauge.



PERFORMANCE

- Two speed tracking and simultaneous cab swing and dig functions all add up to faster working speeds.
- Short pitch rubber tracks add to performance with far less potential for ground damage.
- Emergency shut-off valve, if the boom or dipper cylinder hose for lifting is ruptured, the emergency shut-off valve is activated to prevent the boom or dipper from falling rapidly.
- Overload warning device if a weight greater than the lifting capacity is applied or lifted, the overload warning device is activated and the horn sounds.

OPERATION

A comfortable cab incorporates useful operating features;

- Pilot operated joystick controls and foot pedals makes for easy uncomplicated drive and operations.
- Adjustable seat and arm rests.
- Two way auxiliary hydraulics plumbed to the boom arm allows alternative tools to be used on site.
- Well positioned controls make for comfortable all day operation.

SAFETY & SERVICE

- Electronic engine monitoring.
- Automatic fuel bleed system.
- Triple Flange Rollers for improved track retention.
- Remote slew lubrication system.
- Vandalism protected lockable fuel tank and engine compartment.
- Hydraulic oil cooler.
- Engine oil Safe Drain system.

OPTIONS

- Air Conditioning
- QuickHitch
- TFM Takeuchi Fleet Management




TSS -TAKEUCHI SECURITY SYSTEM


The TB235.-2 comes with **TSS immobiliser key** as standard. Includes 1 red master key and 3 black ignition keys. Can programme up to 13 user keys.



TB235-2 COMPACT MINI EXCAVATOR



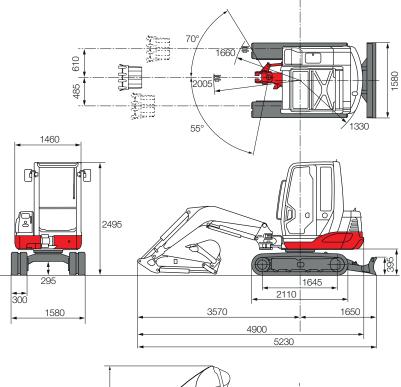

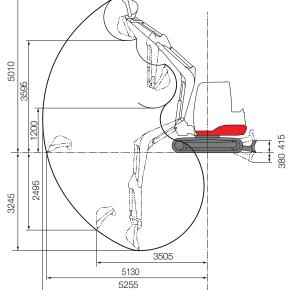

All dimensions unless otherwise stated are in millimetres.



Takeuchi machines come with a full 3 year/3000 hours warranty as standard, terms and conditions apply* see website.

Before fitment of a hydraulic attachment, machine auxiliary pressure and flow should be accurately measured. For all lifting specifications please refer to the lift charts on the Takeuchi website or operator manual.

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment. **TB235-2** Standard UK Specification Long Arm Mono Boom / Rubber Tracks / Blade

Rubber Tracks / Blade	
Engine	
Make	YANMAR
Model	3TNV88
Rated Output (kW)/rpm	18.2/2400
Maximum Torque (Nm)	92.2
Cylinders	3
Displacement (cc)	1642
Electrical System	12V 68A
Dimensions & Weight	_
Operating Weight (kg)	3465
Overall Length (mm) for transport	4900
Width (mm)	1580
Height (mm)	2495
Ground Clearance (mm)	295
Min. Radius at Max Offset (mm)	1660
Tail Swing Radius (mm)	1330
Dozer Blade (W x H) (mm)	1580 x 395
Operating Information	
Max Digging Depth (mm)	3245
Max Dump Height (mm)	3595
Max Reach at Ground Level (mm)	5130
Max Vertical Digging Depth (mm)	2495
Max Bucket Digging Force (kN)	27.1
Max Arm Breakout Force (kN)	17.3
Hydraulic System	11.0
Set Pressure (bar)	210
Pump Type	Variable x 2 + Gear x 2
1 st Aux Max Flow I/min	60
Pressure bar	210
2nd Aux Max Flow I/min	22
Pressure bar	200
Swing System	
Boom Swing Angle (L/R)	70°/55°
Slew Speed (rpm)	9.3
Slew Motor	Piston
Slew Brake	Wet Friction Plate
Undercarriage	1101 Hotel Hotel
Traction Motor	Axial Piston
Traction Drive	Planetary
Traction Brake	Wet Friction Plate
Track Width (mm)	300
Ground Contact Length (mm)	1645
Ground Pressure cab (kPa)	31.4
Travel Speed (km/h)	2.8 - 4.2
Maximum Gradeability	-
Capacities	30°
Hydraulic System (I)	68
Fuel Tank (I)	
Engine Lubrication (I)	46
	4.7
Cooling System (I)	4.0
Health and Safety	
Health and Safety Noise Level Sound Power Level (LwA) Vibration Hand Arm / Body m/sec ²	93 dB ≤2.5 / ≤0.5

04/2025

For more information locally contact:



Takeuchi Mfg (UK) Ltd, Unit E2B Kingsway Business Park, John Boyd Dunlop Drive, Rochdale, Lancashire OL16 4NG info@takeuchi-mfg.co.uk www.takeuchi-mfg.co.uk



