

**TB20e**  
electric power  
1930KG



## COMPACT ELECTRIC EXCAVATOR



100% BATTERY POWERED

3-YEAR / 3,000 HOUR  
WARRANTY AS STANDARD\*


# **TB20e** *electric power* NEW ELECTRIC compact excavator

The TB20e is the latest innovation in the Takeuchi excavator line-up. A fully electric machine, and the first Takeuchi excavator to feature electro-hydraulic controls.

Built with the same all steel construction, heavy duty boom and retractable under carriage, matching the performance of its diesel TB216 equivalent.

The TB20e is ideal for applications in noise sensitive areas such as schools or hospitals, operating at 80dB and 15% quieter than a diesel excavator. This environmentally friendly option offers a more sustainable choice.



980mm  1300mm  
Expanding undercarriage



 **3-YEAR**  
**3,000 HOUR**  
WARRANTY AS STANDARD\*



**100% ELECTRIC**

**ZERO EMISSIONS**

# PRODUCT FEATURES & SPECIFICATIONS

## OPERATOR STATION

- 4.3" high definition, multifunction colour display
- ISO/SAE pattern change valve via monitor
- ROPS/TOPS/OPG (Level 1)
- Suspension seat
- Retractable seat belt
- Foldable travel pedals
- Boom swing pedal, with foldable footrest
- Emergency stop switch
- Safe start system (left console)

## ZERO EMISSION ELECTRIC POWER

- 24.7 kWh lithium-ion battery
- 100% battery powered with zero emissions
- Reduced sound and vibration levels
- ECO mode

## CHARGING

- On-board charger - charge static
  - On-board charger - charge whilst operating
- Optional Fast Charger
- Off-board Fast charger - reducing charge time to 2-4 hours

## ELECTRICAL

- Weather resistant rocker switches
- LED light package; boom, canopy, rear
- Travel alarm
- 12V battery disconnect switch
- Hour meter/trip meter
- 12V power outlet
- TFM (Takeuchi Fleet Management)

## ELECTRO - HYDRAULIC

- 2 electric motors
- Load sensing system for operation
- Electro-hydraulic joysticks
- First auxiliary circuit with proportional control
- Detent for first auxiliary circuit
- Autotank
- 1st, 2nd and 3rd as standard. First auxiliary plumbed to mid-arm
- Adjustable hydraulic flow on first auxiliary
- Cushioned boom and swing cylinders
- Top mount boom cylinder
- Boom and arm holding check valves
- Lift alarm
- Steel hydraulic tank with fluid level sight gauge

## UNDERCARRIAGE AND FRAME

- Triple flange track rollers
- Hydraulically retractable undercarriage
- Adjustable width dozer blade
- Two-speed travel with auto step down
- Wraparound protective counterweight
- Rubber tracks 230mm



**TFM** is a remote **TELEMATICS** system, using real time data to better manage your fleet and lower overall operating costs.



## TB20e

*electric power*



- 24.7kWh Lithium-Ion battery
- Retractable undercarriage
- Full charge runs 8 hours - 65% load
- Matches the performance of a diesel equivalent (TB216)

### THREE CHARGING OPTIONS

- On-board – domestic
- Tethered – when operating
- Optional Off-board – 3 phase fast

### 8 HOURS OPERATING

The TB20e is 100% battery powered with zero exhaust emissions. With a full charge the 24.7kWh maintenance free lithium-ion battery provides up to 8 hours of operating time at 65% load.

### CHARGING OPTIONS

The TB20e features as standard an on-board charger, 95V to 265V single-phase



- On-board charger - charge static
- On-board charger - charge whilst operating

Optional off-board Fast Charger, 408V to 552V

- 3-phase Fast Charge

The optional off-board Fast Charger is available for fast 3-phase charging. Easy to transport with a simple hook-on to the dozer blade. (See back page for charging times).



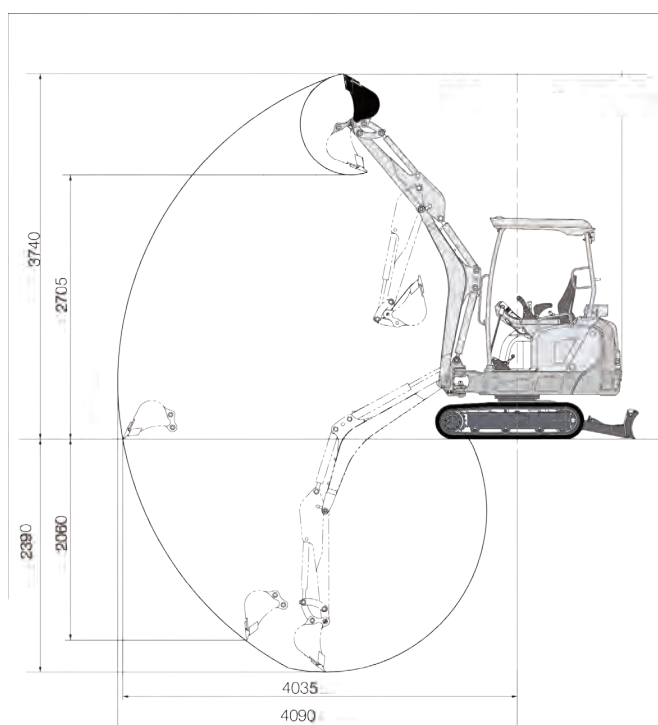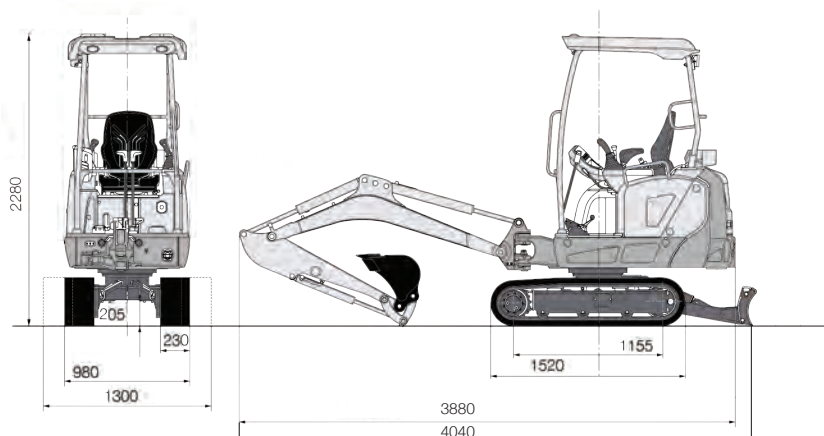

All dimensions unless otherwise stated are in millimetres.

**FULL  
3-YEAR  
3,000 HOUR\*  
WARRANTY**

Takeuchi machines come with a full 3 year/3000 hours warranty as standard, terms and conditions apply\* see website.

Before fitment of a hydraulic attachment, machine auxiliary pressure and flow should be accurately measured. For all lifting specifications please refer to the lift charts on the Takeuchi website or operator manual.

In accordance with our established policy of constant improvement, we reserve the right to amend these specifications at any time without notice. Photographs shown may feature non-standard equipment.

**TB20e** Standard UK Specification Canopy -  
Long Arm / Rubber Tracks / Blade

Lithium Ion Battery	
Battery Capacity (kWh)	24.7
Battery Voltage (V)	73
WORKING TIME	
Continuous Working Time @ 65% Load	Up to 8 Hours
BATTERY CHARGE HOURS	
Off-Board Charger @ 340 - 460V	Approx. 2 hours
On-Board Charger @ 95 - 265V	Approx. 6 hours
BATTERY CHARGE HOURS	
Off-Board Charger @ 340 - 460V	Approx. 4 hours
On-Board Charger @ 95 - 265V	Approx. 10 hours
Lead-Acid Battery	
Battery Capacity (IEC 60095-1)	12V-45A-h
Dimensions & Weight	
Operating Weight (kg)	1930
Fast Charger Weight (kg)	71
Width (mm)	980 - 1300
Length (mm) (overall)	4040
Length (mm) (transport)	3880
Height (mm)	2280
Ground Clearance (mm)	205
Min. Radius at Max Offset (mm)	1480
Tail Swing Radius (mm)	1075
Operating Information	
Max. Dig Depth (mm)	2390
Max. Dump Height (mm)	2705
Max. Ground Reach (mm)	4035
Max. Vertical Dig Depth (mm)	2060
Max. Bucket Digging Force (kN)	13.7
Max. Arm Digging Force (kN)	8.1
Travel Speed 1st (km/h)	2.1
2nd (km/h)	4.0
Slew Speed (rpm)	7.6
Boom Swing Angle (Left/Right)	78°/49°
Gradeability	15°
Ground Pressure (kPa)	32.1
Traction Force (kN)	20.7
Hydraulic System	
System Pressure (bar)	206
Pump Type	2 x Gear
1st Auxiliary Maximum Flow (l/min) / Pressure (bar)	34/180
2nd Auxiliary Maximum Flow (l/min) / Pressure (bar)	11/210
3rd Auxiliary	
Low Pressure - for engage (bar)	34
High Pressure - for release (bar)	215
Hydraulic Breaker	
TKB72 (working weight kg)	105
TKB72-S (working weight kg)	135
Safety and Health	
Noise / Sound Power Level (LwA)	80dB
Vibration Hand Arm / Body (m/sec²)	≤2.5 / ≤0.

04/2025

For more information locally contact:



SCAN ME

To find your  
local dealer

Takeuchi Mfg (UK) Ltd, Unit E2B Kingsway Business Park,  
John Boyd Dunlop Drive, Rochdale, Lancashire OL16 4NG  
info@takeuchi-mfg.co.uk www.takeuchi-mfg.co.uk

@TakeuchiUK

**TAKEUCHI**  
From World First to World Leader